


Selector Valve Concept

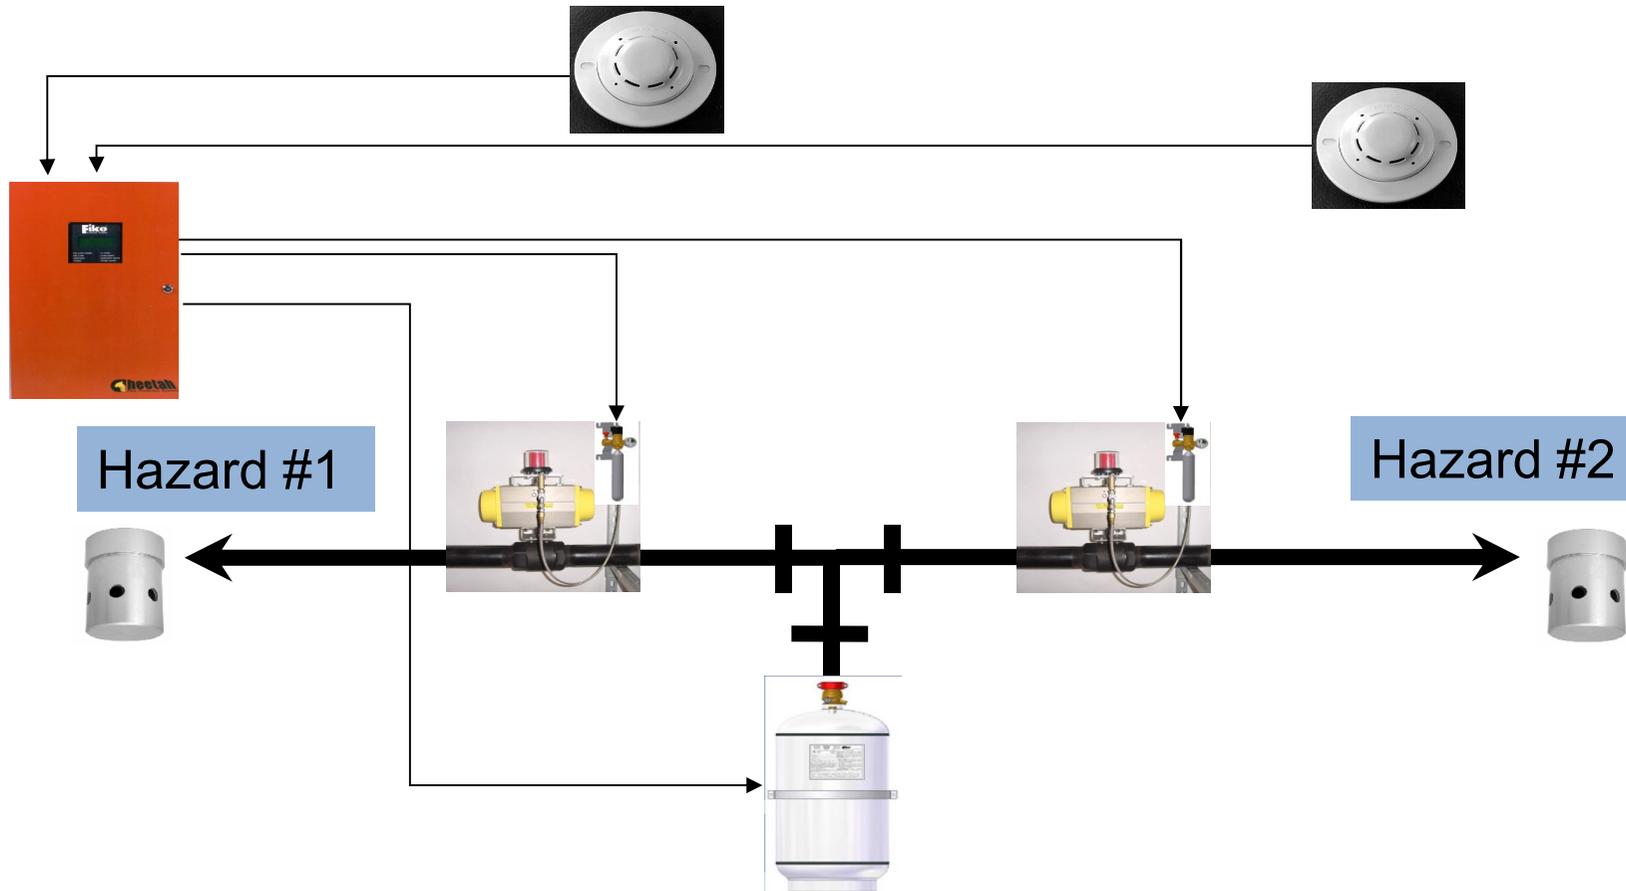

Selector Valves

Selector Valves Sizes:

- 1", 1-1/2", 2" & 3"

Material:

- Carbon Steel or Stainless Steel

Method of Actuation:

- Electric (24V DC) and Manual

Valve Mounting:

- Horizontal or Vertical

Solenoid Actuator Location:

- From 3'-0" to 42'-0"

For use with:

- ECARO-25, HFC-227ea, ProInert systems

Hardware provided:

- Selector Valve (spring return)
w/ Actuator, position indicator, relief
/ pop-off valve
- Solenoid Actuator Kit
- 1/4" Check Valve & Elbow
- 1/4" SST Flexible Hose – 3'-0" lg.

All necessary parts are provided to install selector valve and solenoid actuator.

Approvals: FM

Selector Valve Sizes

Part Number	Description	Thread Size & Type
IG71-1899-10-XX	Selector Valve – 1”	1” (25mm) NPT Female
IG71-1899-15-XX	Selector Valve – 1½”	1½” (40mm) NPT Female
IG71-1899-20-XX	Selector Valve – 2”	2” (50mm) NPT Female
IG71-1899-30-XX	Selector Valve – 3”	3” (80mm) NPT Female



Selector Valve Solenoid Actuators

24 VDC Solenoid
Operated Actuator
Assembly provided with
each Selector Valve



Primary Actuator
w/ UVO