

# Nuevos Dispositivos de Notificación AV – La Serie-L



# Serie - 1

**Información General**

**Beneficios**

**Lanzamiento**

# L-Series – Detalle General

# La Línea de Productos

## Nueva Línea de Dispositivos AV (interiores y 2 cables únicamente)

- Sirenas, Estrobos, Sirenas Estrobo
- Campanas y Campanas Estrobo
- Bocinas y Bocinas Estrobo
- Accesorios

## Adiciones

- Sirenas Compactas
- Estrobos Compactos
- Sirena Estrobo Compacta
- **Campana Estrobo para techo**
- Bocina de 8" (con puente)



# Los Detalles

- **Diseño “Compacto” mas Atractivo**
- **Compatible con Versiones Anteriores**
  - Compatible con diseños anteriores de 1997
  - Los modelos estándar tienen la misma huella que SpectrAlert Advance
  - Protocolos de Sincronización SpectrAlert y SpectrAlert Advance
- **La estructura del número de modelo sigue siendo consistente**
  - Se agregó una "L" a los números de parte anteriores
    - Ejemplo: P2R → P2RL
  - Se agregó un "G" para tamaño compacto
    - Ejemplo: P2R → P2**G**RL

- **Nuevos Accesorios**

- Kits de bisel - Reemplaza etiquetas adhesivas!
- Lentes de Colores
- Cajas traseras de montaje en superficie
- Anillos de ajuste para retrofits competitivos de dispositivos más grandes



# Las “Facilidades”

## Fácil de Especificar

- La gama más amplia de ajustes candela en la pared y techo - configuración de 15 a 185cd
- Nuevo diseño moderno
- Look familiar consistente
- Bajo perfil, tamaño compacto
- Selección fácil y consistente del número de modelo
- Protocolo de System Sensor ampliamente utilizado




## Fácil de Configurar

- Ajustes seleccionables en el campo
  - Candelas
  - Selección de Tono
  - Voltaje de bocina
  - Potencia
  - Selección Automática de 12- o 24-volts de operación
- Los instaladores pueden configurar fácilmente dispositivos para cumplir con los requisitos
- El ajuste de Candela es claramente visible desde el suelo para una inspección fácil y menos tiempo


# Las Funciones Emblemáticas

## Que se Mantienen

- Diseño plug-in - reduce el tiempo y los gastos para instalar
- Función "snap" preliminar - mantiene el dispositivo en su lugar
- Montaje de un tornillo
- Placa de montaje universal con muelle de cortocircuito a bordo
- **Que se Mejoraron**
- Más espacio para el cableado - para altavoces, hemos añadido 1/4 "de espacio en la caja (2¼" total) facilitando el cableado y reduciendo los cortocircuitos
- Problemas de sincronización se resuelven mas fácilmente

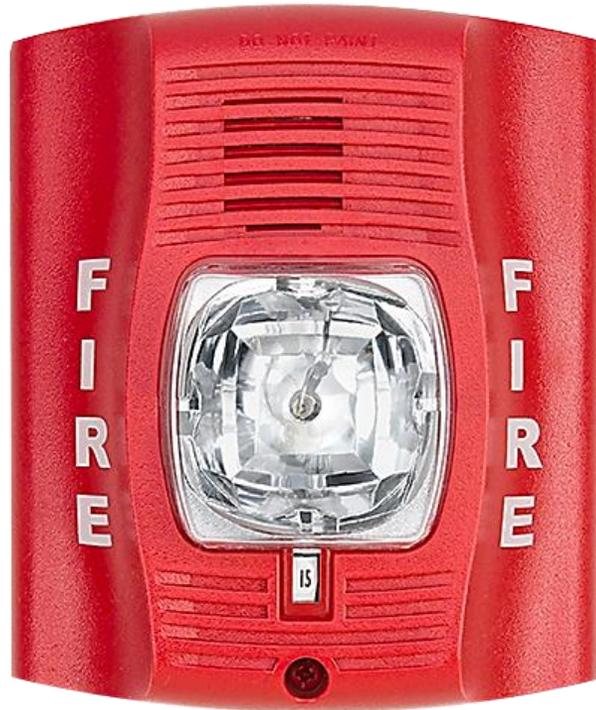

SpectrAlert Advance



L-Series

# Las Características “Familiares”

- **Algunos Modelos Anteriores seguirán ofreciéndose**
  - Sirenas de 4 cables y Sirenas Estrobo
  - Productos AV para Exteriores
  - Placa de Expansión para Doble Estrobo
  - Bases Sonoras de Baja Frecuencia
  - Mini Sirenas

**SPECTRAlert**  
**ADVANCE**  
from System Sensor



## Principales Beneficios de la Serie L


# Principales Beneficios

↓ Consumo de Energía




Menos fuentes de alimentación  
por instalación

↑ Estandarización

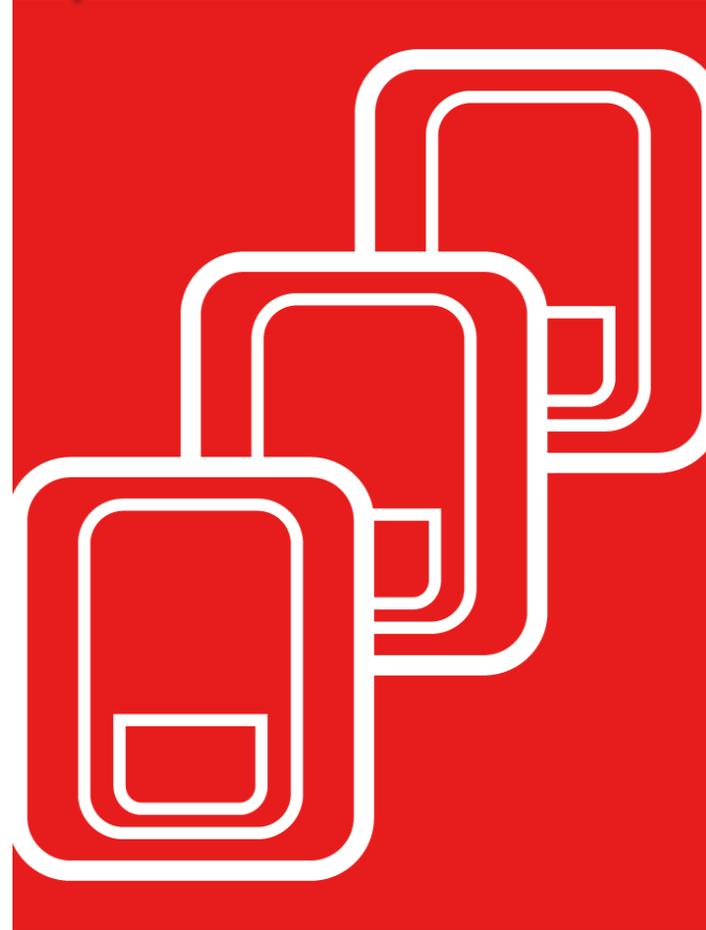

Menos inventario y  
Menos espacio en Anaqueles

↑ Oferta Expandida

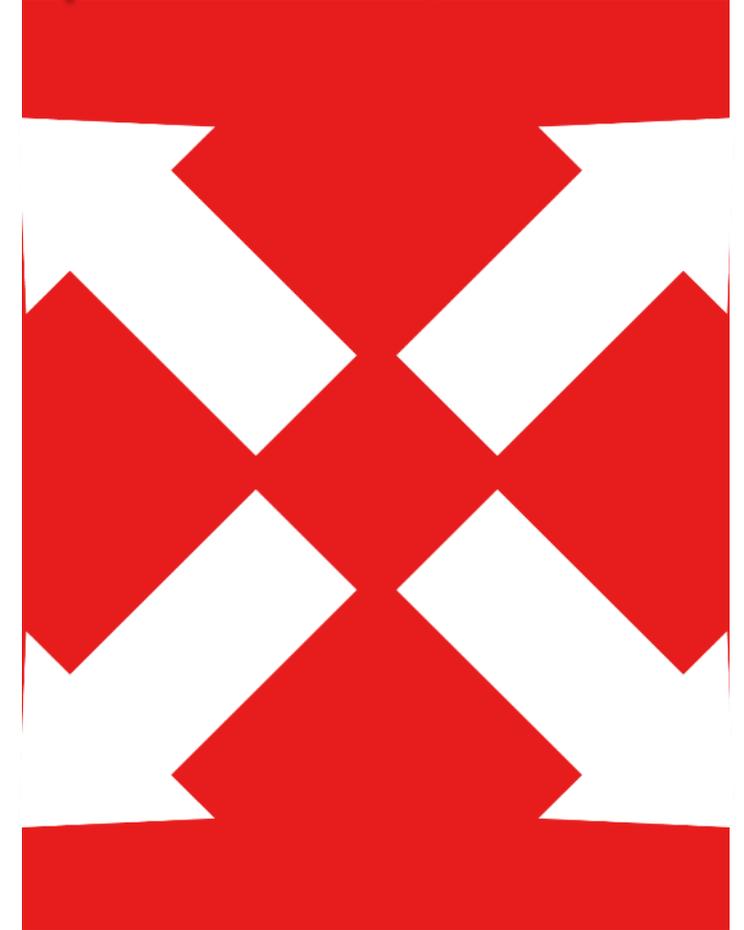

Tamaños estándar y compactos

# Consumo de Energía

- **Consumo de energía más bajo en toda la gama de ajustes candela, Ahorros que van del 17-35%**
- **LEDs no cubre la gama completa**
  - El beneficio del LED se pierde más allá de los ajustes más bajos
  - Xenon funciona mejor - iluminación mucho más brillante, mucho más rápido (20mS)
- **Utilice más dispositivos sin agregar el coste de la fuente de alimentación**
  - Línea actual de SpectrAlert
    - Con las luces estroboscópicas fijadas en 75cd en una fuente de alimentación regulada 3A y el circuito cargado al 80%, se requiere 158mA
    - **15** dispositivos pueden ser colocados en el NAC\*
  - Línea de Productos L-Series
    - Mismo escenario solo requiere 108mA
    - **22** dispositivos pueden ser colocados en el NAC



**Menos fuentes de alimentación por instalación**

# Consumo de Energía: Estrobos en Techo

## Ahorro en Consumo de Corriente (mA)

Candela	15cd	30cd	75cd	95cd	115cd	150cd	177cd
L Series	41	63	111	134	158	189	226
SpectrAlert Advanced	66	94	158	181	202	228	286
Wheelock Exceeder	61	85	135	163	182	205	253
Wheelock LED	40	58	115	258	200	N/A	N/A
Gentex (Cmdr)	120	120	200	220	290	321	N/A

## Ahorros de Energía de L-Series (mA)

Candela	15cd	30cd	75cd	95cd	115cd	150cd	177cd
SpectrAlert Advanced	38%	33%	30%	26%	22%	17%	21%
Wheelock Exceeder	33%	26%	18%	18%	13%	8%	11%
Wheelock LED	3%	9%	28%	48%	N/A	N/A	N/A
Gentex (Cmdr)	66%	48%	45%	39%	46%	41%	N/A



**Menos fuentes de alimentación por instalación**


# Consumo de Energía: Estrobos en Pared

## Ahorro en Consumo de Corriente (mA)

Candela	15cd	30cd	75cd	95cd	110cd	135cd	185cd
L Series	43	63	107	121	148	172	222
SpectrAlert Advanced	66	94	158	181	202	228	286
Wheelock Exceeder	57	85	135	163	182	205	253
Wheelock LED	30	40	115	N/A	200	N/A	N/A
Gentex (Cmdr)	42	58	116	N/A	161	N/A	N/A

## Ahorros de Energía de L-Series (mA)


Candela	15cd	30cd	75cd	95cd	110cd	135cd	185cd
SpectrAlert Advanced	35%	34%	32%	33%	27%	25%	22%
Wheelock Exceeder	25%	26%	21%	26%	19%	16%	12%
Wheelock LED	43%	58%	7%	N/A	26%	N/A	N/A
Gentex (Cmdr)	2%	9%	8%	N/A	8%	N/A	N/A

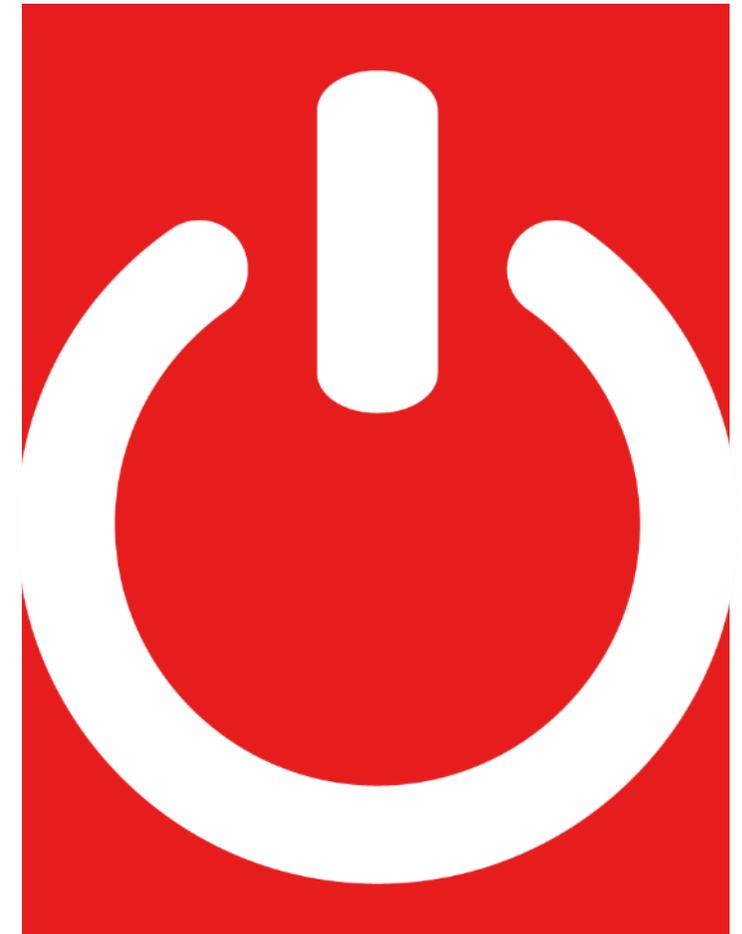

**Menos fuentes de alimentación por instalación**

# Estandarización



- **Simplificada la línea de productos - 30% menos SKU de dispositivos**
- **Significa un menor coste de carga y menos complicaciones para sus clientes**
- **Estrobos**
  - Candela estándar y alta se combinan ahora en un modelo
  - Sólo oferta que cubre toda la gama candela en un modelo
- **Bocinas**
  - Todos los modelos son de Alta Fidelidad
  - Todos los modelos trabajan para la frecuencia baja de 520Hz

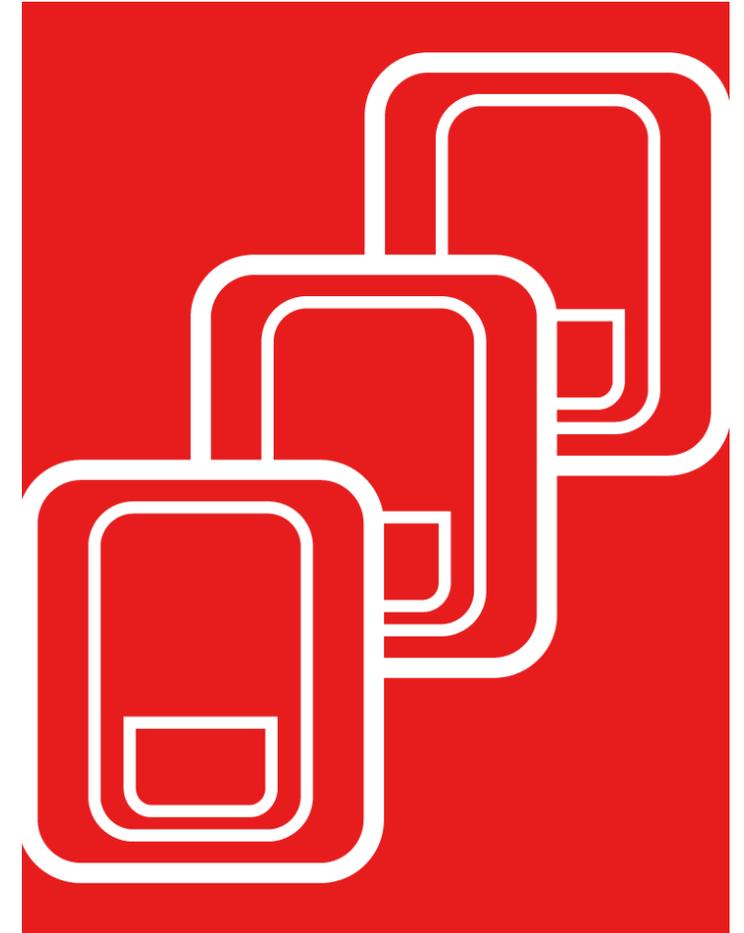

**Menos inventario y Menos espacio en Anaqueles**

# Estandarización


- Productos estandarizados con biseles nuevos facilita aún más la personalización
- Los biseles ofrecen un método más conveniente para personalizar productos para satisfacer las necesidades de ECS, a la vez que ahorran tiempo y dinero en comparación con las calcomanías
- Oferta de biseles: (Pared y Techos)  
ALERT, EVAC, AGENT, FUEGO, FOGO

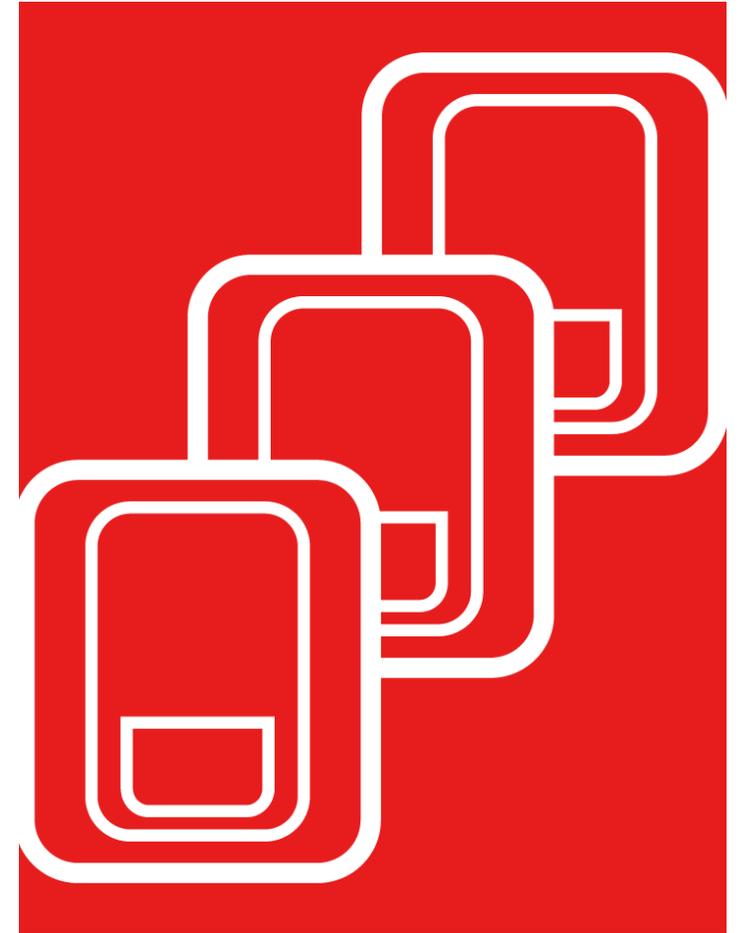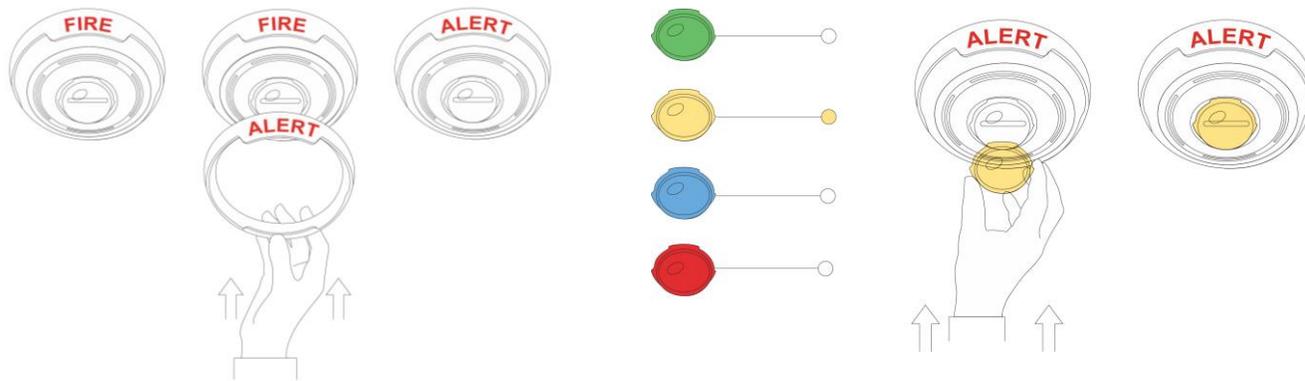

**Menos inventario y Menos espacio en Anaqueles**

# Oferta ampliada: Nuevos productos



- Modelos Compactos
  - Diseñados con arquitectos en mente
  - Los modelos compactos de bajo perfil son visualmente menos intrusivos
  - Se adapta perfectamente a una caja trasera de bastidores simples
  - El mismo bajo consumo de energía que los modelos estándar y aproximadamente la mitad en comparación al producto competitivo de Genesis
- Campana estrobo para techo
- Bocina de 8 watts

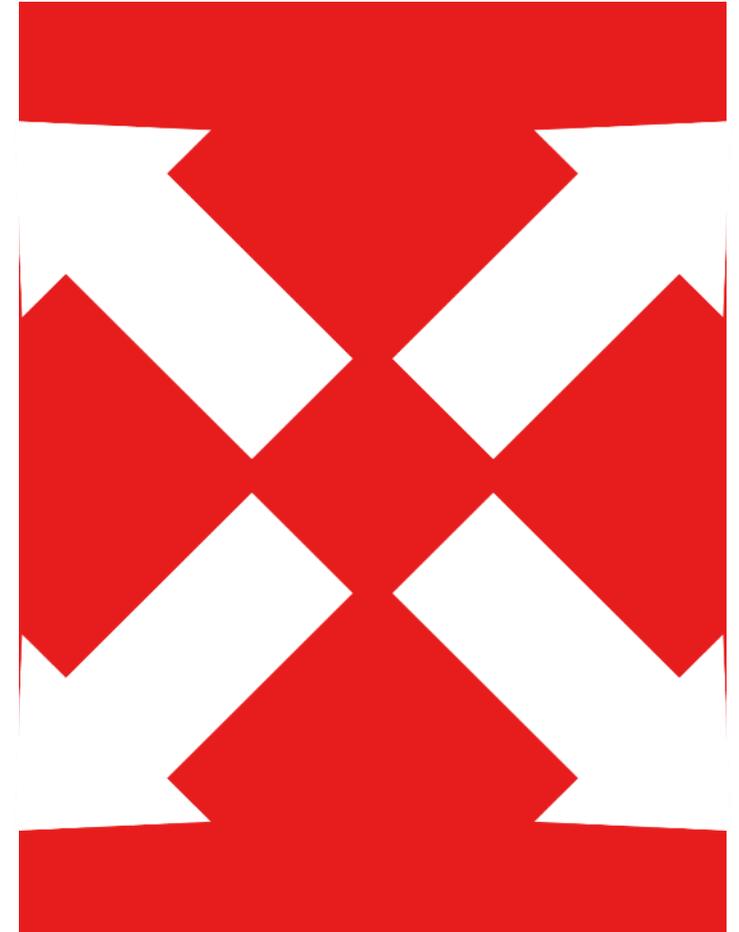

Tamaños estándar y compactos

## Bajo Perfil

- Los modelos Compact y Standard son de perfil bajo (profundidad)
- El modelo estándar mantuvo una huella total de 4x4 para retrofits
- Nuevos modelos compactos de pared vienen en sirena, estrobo y variedades sirena estrobo

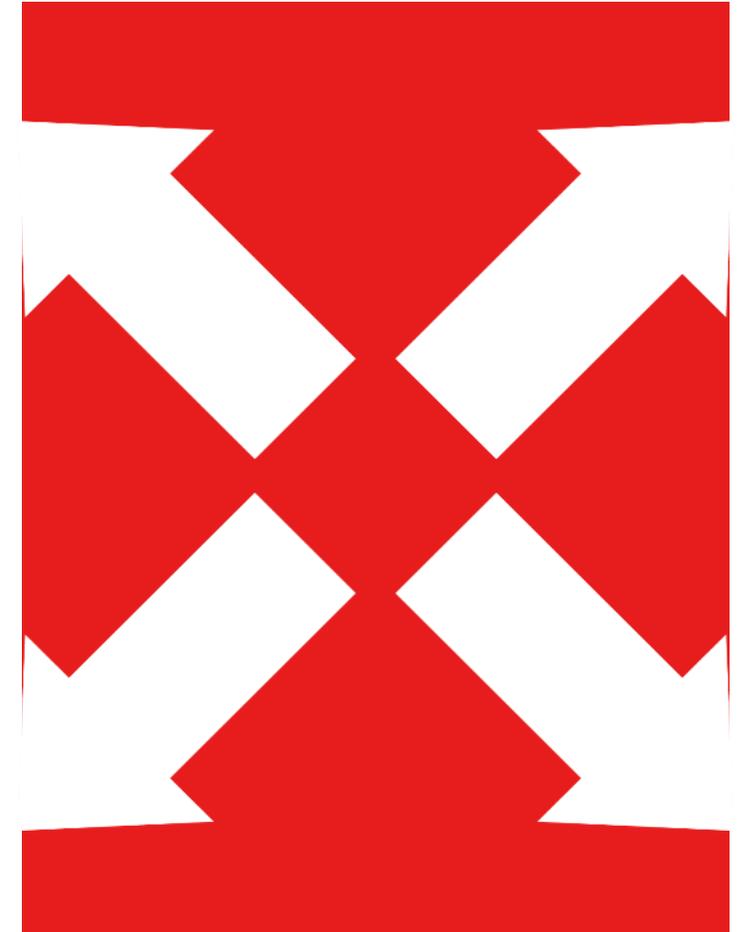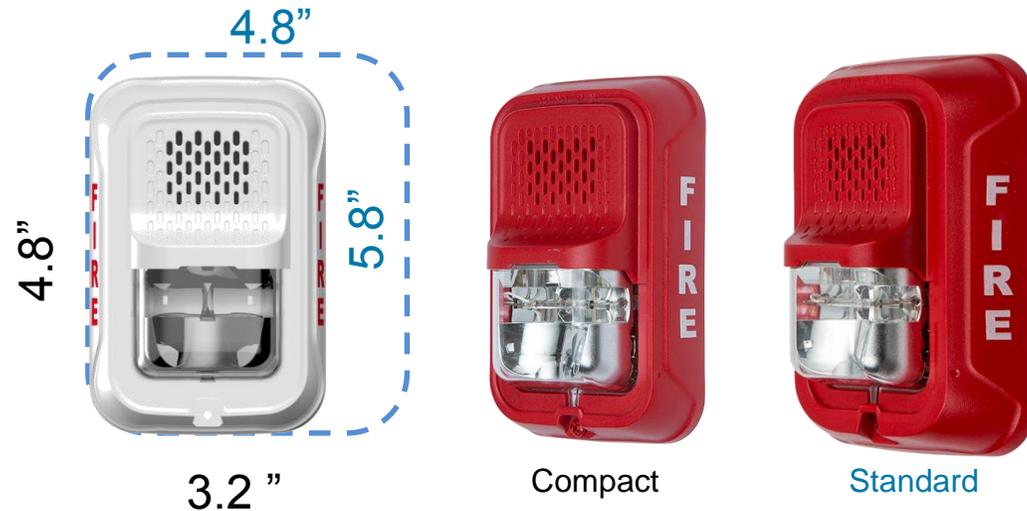

Tamaños estándar y compactos

## Oferta Ampliada - Bocina

### Ahora ofrecemos un altavoz de 8" y puente SPCW8 - 8" altavoz con caja de protección

- Tap setting: 1/8W, 1/4W, 1/2W, 1W, 2W, 4W, 8W
- Voltaje dual: 25 – 70 V
- Tap setting y voltaje son seleccionados mediante conexión de jumpers

### Se envía con caja de protección para montaje en superficie

### Puente SP-SPC8 para aplicaciones en plafones


- Comprado por separado
- Paquete de 4 pzas



# Soporte de producto / Herramientas y detalles de pedido


# Materiales de Lanzamiento

- Data Sheets y Manuales de Instalación
- Cross Reference
- Actualización en Website
  - Datasheets, manuales, fotografías de productos, CAD/REVIT, etc.
- Calculadora de Voltaje
- Anuncios
- Presentaciones
- FAQs
- Actualización de Brochures
- Webinar(s)
- Herramientas en línea
  - Calculadora de caídas del voltaje
  - Calculadoras de SPL
  - Calculadora de cobertura de estrobo

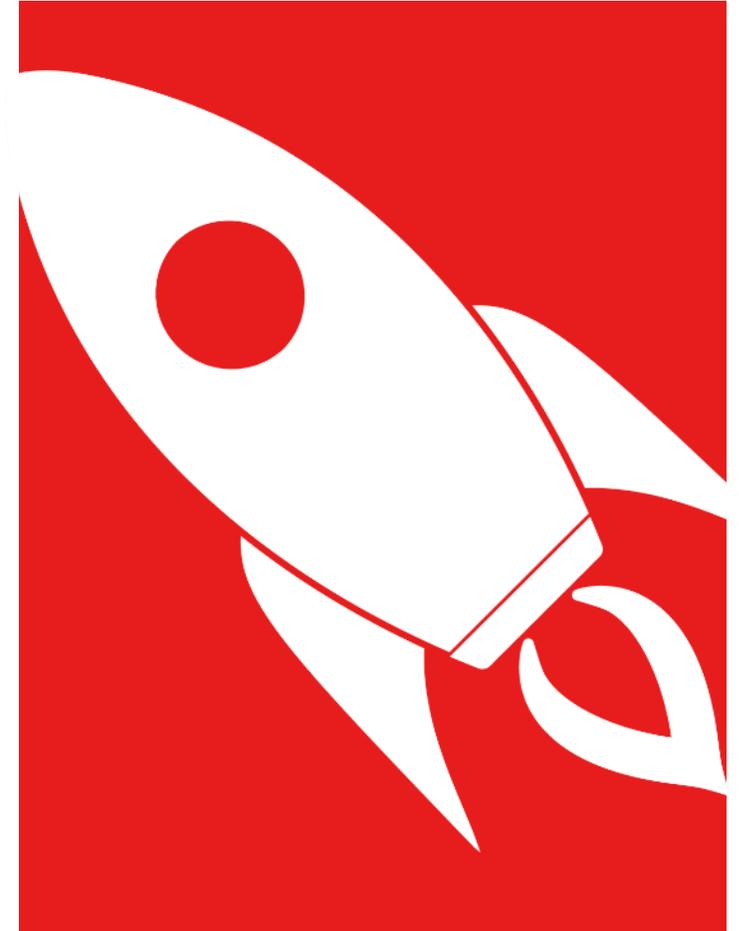

# Calculadora de Caída de Voltaje

- [Link a Calculadora de Caida de Voltaje](#)
- Herramienta en línea rediseñada, L-Series agregado
- Calculadora de batería integrada
- Utilización gratuita con cuenta

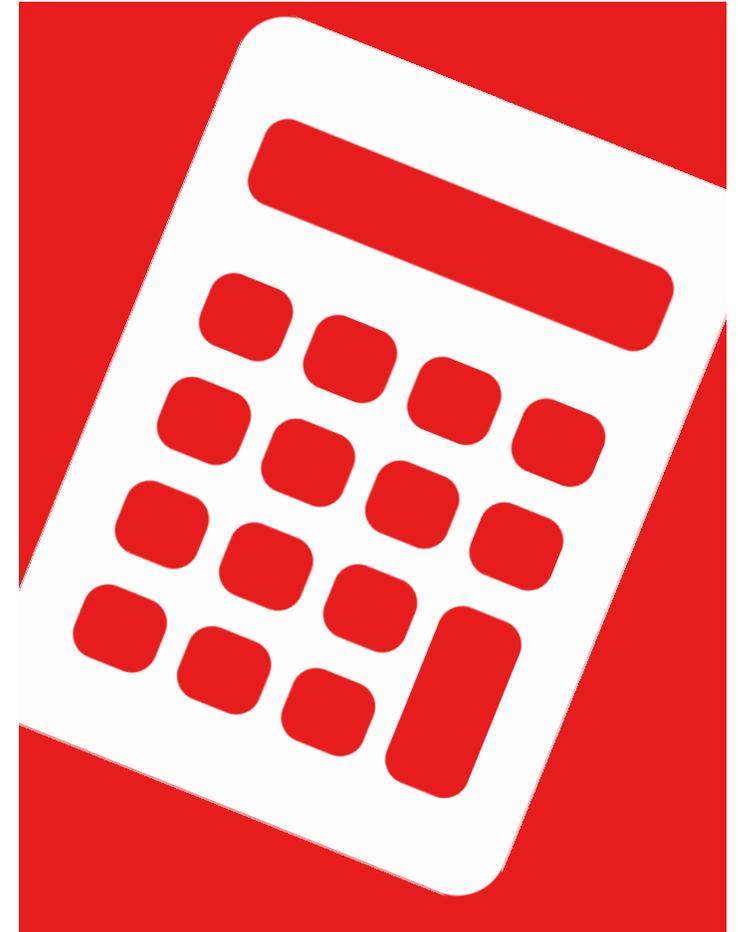

Hotfire Honeywell | Online Tools for Fire

NOTIFIER | VOLTAGE DROP | BATTERY BACKUP

IMPORT DATA | EXPORT DATA

CIRCUITS	#	CIRCUIT NAME	AMPS	AWG	TOTAL DEVICES	Current Draw	VOLTAGE DROP
<input type="checkbox"/>	1	West Wing	1.5	16	6	1,211	2,987
<input type="checkbox"/>	2	NAC Circuit 2	1.5	14			
<input type="checkbox"/>	3	NAC Circuit 3	1.5	14			

DEVICES IN CIRCUIT NAME	#	MODEL	CANDELA	PATTERN	VOLUME	TONE	CURRENT (amps)	DISTANCE FROM LAST DEVICE (ft.)	12 AWG	14 AWG	16 AWG	18 AWG
<input type="checkbox"/>	1	P2R	110	Temporal	Low		0.198	50	20.181	20.052	19.846	19.519
<input type="checkbox"/>	2	P2R	110	Temporal	Low		0.198	50	19.977	19.729	19.531	18.700
<input type="checkbox"/>	3	P2R	110	Non-temporal	High		0.221	50	19.813	19.469	18.917	18.041
<input type="checkbox"/>	4	P2R	110	Temporal	Low		0.198	50	19.684	19.280	18.615	17.561
<input type="checkbox"/>	5	P2R	110	Temporal	Low		0.198	50	19.614	19.154	18.414	17.241
<input type="checkbox"/>	6	P2R	110	Temporal	Low		0.198	50	19.574	19.081	18.311	17.081


Model:  Candela:  Pattern:  Volume:  Tone:  Number of Devices:  Distance from Devices (ft.):

ADD DEVICES | ADD TO FAVORITES

© 2016 Honeywell International Inc.

# Otras Herramientas

- Opciones de Montaje
- Calculadora de pérdida de presión de sonido
- Calculadora de la cobertura del estrobo

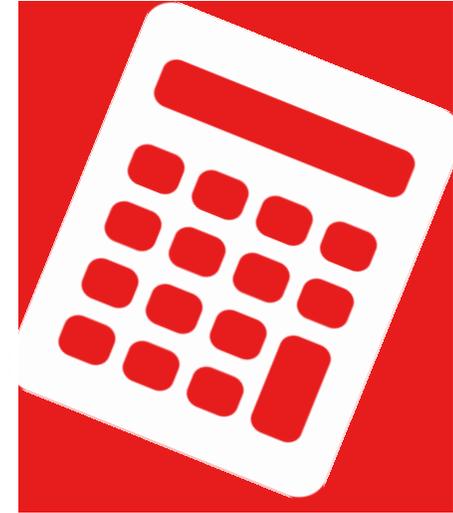

**SYSTEM SENSOR**

Enter your search term...

PRODUCTS DOCUMENT CENTER TOOLS RESOURCES SUPPORT TRAINING CENTER

System Sensor \ English (US) \ Tools \ AV \ Sound Pressure Loss Calculator

## Sound Pressure Loss Calculator

Enter speaker dBA specification at 10 feet and other distances are calculated in a table below.

dB spec (dBA @ 10 ft.):

dBA	Feet
111	0.5
105	1
102	1.4
99	2
97	2.5
93	4
91	5
87	8
85	10
82	14
81	16
79	20

TOOLS

- AV
  - Mounting Options
  - Sound Pressure Loss Calculator
  - Strobe Coverage Calculator
  - Voltage Drop Calculator
- Aspiration
  - FAAST Firmware
  - PipelQ Software
- CO
  - i4 CO/Smoke Value Calculator
  - i4 CO/Smoke Voltage Calculator
- Spot
  - Base/OEM Detector

**SYSTEM SENSOR**

Enter your search term...

PRODUCTS DOCUMENT CENTER TOOLS RESOURCES SUPPORT TRAINING CENTER NEWS & EVENTS

System Sensor \ English (US) \ Tools \ AV \ Mounting Options

## Mounting Options

Unique and powerful, the Mounting Options Tool simplifies the identification of mounting options for any SpectrAlert Advance installation! In seconds, you can choose the model, mounting location, back box, and accessories for your installation and then view a detailed drawing of how each piece fits together.

Select an option from each drop down menu

**MODEL**  
2-wire Horn Strobe

**LOCATION**  
Outdoor Wall

**BACK BOX OPTIONS**  
4 X 4 x 1-1/2 Deep

**ACCESSORIES**  
Weatherproof Plate

**MODEL NUMBER SEARCH**

Drawing - Exploded View

Refer to data sheets for specific model numbers

TOOLS

- AV
  - Mounting Options
  - Sound Pressure Loss Calculator
  - Strobe Coverage Calculator
  - Voltage Drop Calculator
- Aspiration
  - FAAST Firmware
  - PipelQ Software
- CO
  - i4 CO/Smoke Value Calculator
  - i4 CO/Smoke Voltage Calculator

# Clave del número de modelo

# Clave del número de modelo – Serie L

Product Categories	Speakers and Speaker Strobes	Horns, Strobes, and Horn Strobe (Standard)	Horns, Strobes, and Horn Strobe (Compact)	
<b>Model Number</b>	<b>SPSCWL-ALERT</b>	<b>PC2RL-P</b>	<b>PG2RL-P</b>	
<b>Category</b>	<b>SPS</b>	<b>P</b>	<b>P</b>	<b>SP</b> = Speaker; <b>SPS</b> = Speaker Strobe; <b>P</b> = horn strobe; <b>S</b> = strobe; <b>H</b> = horn; <b>CH</b> = chime; <b>CHS</b> = chime strobe
<b>Mount</b>	<b>C</b>	<b>C</b>	<b>N/A*</b>	<b>C</b> = Ceiling-Mount (*all other models are wall-mount)
<b>Size</b>	<b>N/A*</b>	<b>N/A*</b>	<b>G</b>	<b>G</b> = Compact (*all other models are standard; ceiling-mount devices do not have compact models)
<b>Wiring</b>	<b>N/A*</b>	<b>2</b>	<b>2</b>	<b>2</b> = 2-wire; <b>4</b> = 4-wire (*horn strobe only)
<b>Color</b>	<b>W</b>	<b>R</b>	<b>R</b>	<b>W</b> = White; <b>R</b> = Red
<b>Series</b>	<b>L</b>	<b>L</b>	<b>L</b>	<b>L</b> = L-Series (No "L" = SpectrAlert Advance)
<b>Marking</b>	<b>-ALERT</b>	<b>-P</b>	<b>-P</b>	<b>-ALERT</b> = Amber Lens ALERT; <b>-CLR-ALERT</b> = Clear Lens ALERT; <b>-P</b> = Plain; <b>-SP</b> = FUEGO
<b>Verbal Examples</b>	<ul style="list-style-type: none"> <li>• <b>SPSCWL-ALERT</b> = L-Series, White, Ceiling, Speaker Strobe, w/ Amber Lens and Alert Marking</li> <li>• <b>SPSRL</b> = L-Series, Red, Wall, Speaker Strobe</li> <li>• <b>SPCWL</b> = L-Series, White, Ceiling, Speaker</li> </ul>	<ul style="list-style-type: none"> <li>• <b>PC2RL-P</b> = L-Series, Red, Ceiling, 2-wire, Horn Strobe, w/ Plain Marking</li> <li>• <b>P2RL</b> = L-Series, Red, Wall, 2-wire, Horn Strobe</li> <li>• <b>HRL</b> = L-Series, Red, Horn</li> <li>• <b>SCWL</b> = L-Series, White, Ceiling, Strobe</li> </ul>	<ul style="list-style-type: none"> <li>• <b>PG2RL-P</b> = L-Series, Red, Wall, 2-wire, Compact, Horn Strobe, w/ Plain Marking</li> <li>• <b>P2GRL</b> = L-Series, Red, Wall, 2-wire, Compact, Horn Strobe</li> <li>• <b>HGRL</b> = L-Series, Red, Compact, Horn</li> <li>• <b>SGWL</b> = L-Series, White, Wall, Compact, Strobe</li> </ul>	

**Candela Settings:** Wall (15, 30, 75, 95, 110, 135, 185); Ceiling (15, 30, 75, 95, 115, 150, 177)

# Clave del número de modelo – Serie L - Biseles

Product Categories	Speakers and Speaker Strobes	Horns, Strobes, and Horn Strobe (Standard)	Horns, Strobes, and Horn Strobe (Compact)	
<b>Model Number</b>	<b>BZSPWC-SP</b>	<b>BZCW-SP</b>	<b>BZGW-SP</b>	
<b>Bezel Kit</b>	<b>BZ</b>	<b>BZ</b>	<b>BZ</b>	<b>BZ = Bezels</b>
<b>Category</b>	<b>SP</b>	<b>N/A*</b>	<b>N/A*</b>	<b>SP = Speaker; SPS = Speaker Strobe (*no letter designates horns, strobes, and horn strobes)</b>
<b>Mount</b>	<b>C</b>	<b>C</b>	<b>N/A*</b>	<b>C = Ceiling-Mount (*all other models are wall-mount)</b>
<b>Size</b>	<b>N/A*</b>	<b>N/A*</b>	<b>G</b>	<b>G = Compact (*all other models are standard; ceiling-mount devices do not have compact models)</b>
<b>Color</b>	<b>W</b>	<b>W</b>	<b>W</b>	<b>W = White; R = Red</b>
<b>Series</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>*All bezels are for L-Series only</b>
<b>Marking</b>	<b>-SP</b>	<b>-SP</b>	<b>-SP</b>	<b>F = Fire; AL = ALERT; AG = AGENT; EV = EVAC; P = Plain; SP = FUEGO; PG = FOGO</b>
<b>Verbal Examples</b>	<ul style="list-style-type: none"> <li>• <b>BZSPWC-SP</b> = Bezel for a White, Ceiling, Speaker, w/ Fuego Marking</li> </ul>	<ul style="list-style-type: none"> <li>• <b>BZCW-SP</b> = Bezel for a White, Ceiling, Horn Strobe, w/ Fuego Marking</li> </ul>	<ul style="list-style-type: none"> <li>• <b>BZGW-SP</b> = Bezel for a White, Compact, Horn Strobe, w/ Fuego Marking</li> </ul>	

# Clave del número de modelo – Serie L - Accesorios

Product Categories	Surface-mount Back Box	Trim Ring	Retrofit Plate	
<b>Model Number</b>	<b>SBBCWL</b>	<b>TRC-2W</b>	<b>RFPW</b>	
<b>Category</b>	<b>SBB</b>	<b>TR</b>	<b>RFP</b>	<b>SBB = Back Box; TR = Trim Ring; RFP = Retrofit Plate</b>
<b>Mount</b>	<b>C</b>	<b>C</b>	<b>N/A*</b>	<b>C = Ceiling-Mount (*all other models are wall-mount)</b>
<b>Size</b>	<b>N/A*</b>	<b>N/A*</b>	<b>N/A*</b>	<b>G = Compact (*all other models are standard; ceiling-mount devices do not have compact models)</b>
<b>Color</b>	<b>W</b>	<b>W</b>	<b>R</b>	<b>W = White; R = Red</b>
<b>Series</b>	<b>L</b>	<b>2*</b>	<b>N/A</b>	<b>L = L-Series (No “L” = SpectrAlert Advance; *for trim rings “2” is used to designate L-Series)</b>
<b>Verbal Examples</b>	• <b>SBBCWL</b> = L-Series, White, Ceiling, Surface-mount Back Box	• <b>TRC-2W</b> = L-Series, White, Ceiling, Trim Ring	• <b>RFPW</b> = White, Retrofit Plate	

Lenses (“2” designates L-Series)					
<b>Wall</b>	<b>LENS-B2</b>	<b>LENS-R2</b>	<b>LENS-G2</b>	<b>LENS-A2</b>	<b>B = Blue, R = Red, G = Green, A = Amber</b>
<b>Ceiling</b>	<b>LENS-BC2</b>	<b>LENS-RC2</b>	<b>LENS-GC2</b>	<b>LENS-AC2</b>	

# Detalles para Ordenar - Dispositivos

## Wall-Mount Horn Strobes

L-Series	Description	Marking	Lens
P2RL	2-WIRE, RED	FIRE	CLEAR
P2WL	2-WIRE, WHITE	FIRE	CLEAR
P2GRL	2-WIRE, RED, COMPACT	PLAIN	CLEAR
P2GWL	2-WIRE, WHITE, COMPACT	PLAIN	CLEAR
P2RL-P	2-WIRE, RED	PLAIN	CLEAR
P2WL-P	2-WIRE, WHITE	PLAIN	CLEAR
P2RL-SP	2-WIRE, RED	FUEGO	CLEAR
P2WL-SP	2-WIRE, WHITE	FUEGO	CLEAR

## Ceiling-Mount Horn Strobes

L-Series	Description	Lens
PC2RL	2-WIRE, RED	CLEAR
PC2WL	2-WIRE, WHITE	CLEAR

## Wall-Mount Strobes

L-Series	Description	Marking	Lens
SRL	RED	FIRE	CLEAR
SWL	WHITE	FIRE	CLEAR
SGRL	RED, COMPACT	N/A	CLEAR
SGWL	WHITE, COMPACT	N/A	CLEAR
SRL-P	RED	PLAIN	CLEAR
SWL-P	WHITE	PLAIN	CLEAR
SRL-SP	RED	FUEGO	CLEAR
SWL-CLR-ALERT	WHITE	ALERT	CLEAR
SWL-ALERT	WHITE	ALERT	AMBER

## Ceiling-Mount Strobes

L-Series	Description	Marking	Lens
SCRL	RED	FIRE	CLEAR
SCWL	WHITE	FIRE	CLEAR
SCWL-CLR-ALERT	WHITE	ALERT	CLEAR

## Wall-Mount Horns

L-Series	Description
HWL	WHITE
HRL	RED
HGRRL	RED, COMPACT
HGWL	WHITE, COMPACT

## Wall-Mount Chimes

L-Series	Description
CHWL	WHITE
CHRL	RED

## Wall-Mount Chime Strobes

L-Series	Description	Lens
CHSRL	RED	CLEAR
CHSWL	WHITE	CLEAR

## Ceiling-Mount Chime Strobes

L-Series	Description	Lens
CHSCRL	RED	CLEAR
CHSCWL	WHITE	CLEAR

## Wall-Mount Speakers

L-Series	Description
SPRL	RED
SPWL	WHITE

## Ceiling-Mount Speakers

L-Series	Description
SPCRL	RED
SPCWL	WHITE

## 8-Watt Speakers

L-Series	Description
SPCW8	8-INCH DUAL VOLTAGE
SB-SPC8	TILE SUPPORT BRACKET

## Wall-Mount Speaker Strobes

L-Series	Description	Marking	Lens
SPSRL	RED	FIRE	CLEAR
SPSWL	WHITE	FIRE	CLEAR
SPSRL-P	RED	PLAIN	CLEAR
SPSWL-P	WHITE	PLAIN	CLEAR
SPSRL-SP	RED	FUEGO	CLEAR
SPSWL-ALERT	WHITE	ALERT	AMBER
SPSWL-CLR-ALERT	WHITE	ALERT	CLEAR

## Ceiling-Mount Speaker Strobes

L-Series	Description	Marking	Lens
SPSCRL	RED	FIRE	CLEAR
SPSCWL	WHITE	FIRE	CLEAR
SPSCWL-P	WHITE	PLAIN	CLEAR
SPSCWL-SP	WHITE	FUEGO	CLEAR
SPSCWL-CLR-ALERT	WHITE	ALERT	CLEAR

# Detalles para Ordenar - Accesorios

## Wall-Mount Bezel Kits for Horns and Strobes

L-Series	Description	Marking
BZR-F	RED	FIRE
BZR-AL	RED	ALERT
BZR-AG	RED	AGENT
BZR-EV	RED	EVAC
BZR-P	RED	PLAIN
BZR-SP	RED	FUEGO
BZR-PG	RED	FOGO
BZW-F	WHITE	FIRE
BZW-AL	WHITE	ALERT
BZW-AG	WHITE	AGENT
BZW-EV	WHITE	EVAC
BZW-P	WHITE	PLAIN
BZW-SP	WHITE	FUEGO
BZW-PG	WHITE	FOGO
BZGR-F	RED, COMPACT	FIRE
BZGR-AL	RED, COMPACT	ALERT
BZGR-AG	RED, COMPACT	AGENT
BZGR-EV	RED, COMPACT	EVAC
BZGR-P	RED, COMPACT	PLAIN
BZGR-SP	RED, COMPACT	FUEGO
BZGR-PG	RED, COMPACT	FOGO
BZGW-F	WHITE, COMPACT	FIRE
BZGW-AL	WHITE, COMPACT	ALERT
BZGW-AG	WHITE, COMPACT	AGENT
BZGW-EV	WHITE, COMPACT	EVAC
BZGW-P	WHITE, COMPACT	PLAIN
BZGW-SP	WHITE, COMPACT	FUEGO
BZGW-PG	WHITE, COMPACT	FOGO

## Wall Bezel Kits Speaker/Speaker Strobes

L-Series	Description	Marker
BZSPR-P	RED	PLAIN
BZSPR-AL	RED	ALERT
BZSPR-EV	RED	EVAC
BZSPR-AG	RED	AGENT
BZSPR-F	RED	FIRE
BZSPW-P	WHITE	PLAIN
BZSPW-AL	WHITE	ALERT
BZSPW-EV	WHITE	EVAC
BZSPW-AG	WHITE	AGENT
BZSPW-F	WHITE	FIRE

## Ceiling Bezel Kits Speaker/Speaker Strobes

L-Series	Description	Marker
BZSPRC-P	RED	PLAIN
BZSPRC-AL	RED	ALERT
BZSPRC-EV	RED	EVAC
BZSPRC-AG	RED	AGENT
BZSPRC-F	RED	FIRE
BZSPWC-P	WHITE	PLAIN
BZSPWC-AL	WHITE	ALERT
BZSPWC-EV	WHITE	EVAC
BZSPWC-AG	WHITE	AGENT
BZSPWC-F	WHITE	FIRE

## Ceiling-Mount Bezel Kits for Horns and Strobes

L-Series	Description	Marking
BZRC-F	RED	FIRE
BZRC-AL	RED	ALERT
BZRC-AG	RED	AGENT
BZRC-EV	RED	EVAC
BZRC-P	RED	PLAIN
BZRC-SP	RED	FUEGO
BZRC-PG	RED	FOGO
BZWC-F	WHITE	FIRE
BZWC-AL	WHITE	ALERT
BZWC-AG	WHITE	AGENT
BZWC-EV	WHITE	EVAC
BZWC-P	WHITE	PLAIN
BZWC-SP	WHITE	FUEGO
BZWC-PG	WHITE	FOGO

## Color Lenses

L-Series	Description	Lens
LENS-A2	WALL	AMBER
LENS-B2	WALL	BLUE
LENS-G2	WALL	GREEN
LENS-R2	WALL	RED
LENS-AC2	CEILING	AMBER
LENS-BC2	CEILING	BLUE
LENS-GC2	CEILING	GREEN
LENS-RC2	CEILING	RED

## 120V Adaptor Plate

L-Series	Description
MP120KL	120 VAC ADAPTER MOUNTING PLATE

## Surface Mount Back Boxes

L-Series	Description
SBBRL	WALL, RED
SBBGRL	WALL, RED, COMPACT
SBBWL	WALL, WHITE
SBBGWL	WALL, WHITE, COMPACT
SBBSPRL	WALL, SPEAKER, RED
SBBSPWL	WALL, SPEAKER, WHITE
SBBCRL	CEILING, RED
SBBCWL	CEILING, WHITE

## Universal Trim Rings

L-Series	Description
TR-2	WALL, RED
TR-2W	WALL, WHITE
TRC-2	CEILING, RED
TRC-2W	CEILING, RED

**Gracias!**