

Reliable Smoke Detection for Lobbies, Atria and Multi-story, Open Spaces

Lobbies and atria in hotels, corporate headquarters, malls and similar venues present particular challenges for smoke detection. These architecturally impressive areas are often open with multi-level constructions dominated by large, glass windows and roofs. The aesthetics and construction of such areas do not allow for easy spot or point detector placement and certainly do not favor wiring.

Similar challenges exist for multi-story open constructions such as theaters, concert halls and other entertainment venues. These facilities seat thousands of spectators, so reliable detection and timely evacuation is critical.

Fire Detection Challenges

- Difficult access for detector installation, maintenance, testing and replacement
- Exposure to direct sunlight
- Multiple reflective surfaces causing false alarms
- Expensive wiring
- Building movement and flex
- Multi-level detection
- Aesthetics
- Safe and timely evacuation

Air-sampling smoke detectors (ASDs) provide the fastest and most reliable detection but may not be cost-effective if very early warning is not the priority.

Beam detectors, a common alternative for spot detectors, have been an adequate and cost-effective solution for detecting smoke in atria, although they don't necessarily fit the aesthetic requirements. Also, they typically come with large, industrial-looking reflectors and often require a control unit at ground level that is prone to vandalism. Wiring in areas that are difficult to access makes deploying beam detectors costly and aesthetically displeasing.

The sun, as its trajectory changes with the seasons, is a major contributor to false alarms. Receivers often require special protection caps to avoid reflected sunlight. Reflective surfaces cause problems with reflective beams, even the motorized detectors with auto-aligning capabilities.



OSID
by  **xtralis™**

Open-area Smoke Imaging Detection (OSID) by Xtralis


OSID by Xtralis overcomes the weaknesses of beam detectors due to its aesthetics and multi-emitter capability. A system can consist of up to seven Emitters and one Imager placed on opposite walls, roughly aligned with one another.

Emitters are battery-powered or wired and placed at different heights, adjusting easily to modern design of atria and lobbies. The installation requires a minimum of wiring, only along the walls while leaving the ceilings untouched. The labor component of the installation is equally low. Three Emitters will cover an area of up to 6,000 sq. ft. (600 m²); five Emitters will go up to 20,000 sq. ft. (2,000 m²), all using just a single 80-degree Imager placed in a corner of the room. One-on-one Imager-emitter configuration using a 7-degree Imager can protect corridors of up to 492 ft. (150 m).

In addition, OSID offers many advantages over traditional beam and spot smoke detectors, the primary one being the use of dual light frequencies. Ultraviolet (UV) and infrared (IR) wavelengths, which are outside the range visible to humans, assist in the identification of real smoke compared to larger objects such as insects and dust, thus reducing false alarms. Furthermore, OSID is equipped with a CMOS imaging chip with many pixels rather than a single photodiode. This concept allows the Imager to provide simple alignment as well as excellent tolerance to building movement and vibration, without the use of moving parts.

OSID's optical filtering, high-speed image acquisition and intelligent software algorithms enable the Imager to process the image and provide new levels in stability and sensitivity while providing greater immunity to high-level lighting variability, allowing OSID to provide extra stability in sunlit areas like atria.

Alignment of the Emitter is simple and is achieved by using a low-cost laser alignment tool to rotate the optical spheres until the laser beam from the alignment tool is within proximity to the Imager. No further alignment is required, resulting in extremely fast installation and set-up. Only the Imager has to be wired.

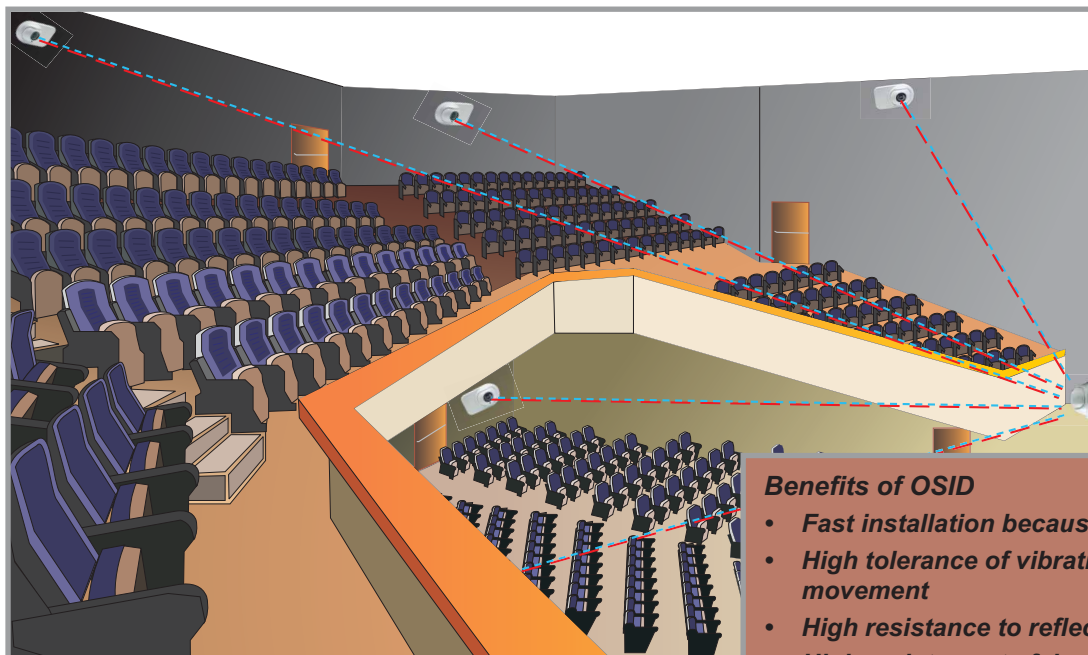

Benefits of OSID

- *Fast installation because only the Imager is wired*
- *High tolerance of vibrations and structural movement*
- *High resistance to reflected sun light*
- *High resistance to false alarms*
- *High resistance to intruding objects, banners*
- *3-D coverage*

www.xtralis.com

The Americas +1 781 740 2223 **Asia** +852 2916 8894 **Australia and New Zealand** +61 3 9936 7000
Continental Europe +32 56 24 19 51 **UK and the Middle East** +44 1442 242 330

The contents of this document are provided on an "as is" basis. No representation or warranty (either express or implied) is made as to the completeness, accuracy or reliability of the contents of this document. The manufacturer reserves the right to change designs or specifications without obligation and without further notice. Except as otherwise provided, all warranties, express or implied, including without limitation any implied warranties of merchantability and fitness for a particular purpose are expressly excluded.

This document includes registered and unregistered trademarks. All trademarks displayed are the trademarks of their respective owners. Your use of this document does not constitute or create a licence or any other right to use the name and/or trademark and/or label.

This document is subject to copyright owned by Xtralis AG ("Xtralis"). You agree not to copy, communicate to the public, adapt, distribute, transfer, sell, modify or publish any contents of this document without the express prior written consent of Xtralis.

OSID
by  **xtralis**TM